

VINYROCK1000

-JAPANESE STANDARD QUALITY-

Product name	VINYROCK1000
Paint type	Water based acrylic resin
Use	interior
Color match	JPMA Color card & other card
Coating amount	0.11-0.13kg/m ² • 1coat
No of Coat	2-3coat
Tools	Brush , Roller
Dilution	clean water
Dilution ratio	10-20%
Touch Dry	30min
Hard Dry	2h
Coating Interval	2h
Specific gravity	1.42±0.03
Package	20kg、4kg
Sealer of interior	VINYROCK SEALER CONC




Make your color!




PT.ROCKPAINT INDONESIA
ROCKPAINT.CO.LTD

Japanese Standard

Anti Alga Test (4weeks)

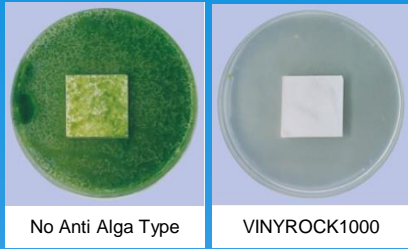

Anti Mold Test (2weeks)

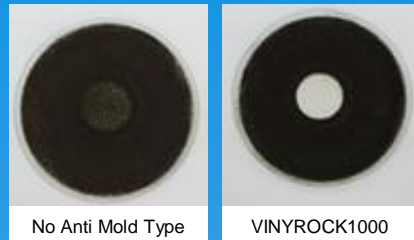

Good Hiding power



VINYROCK 1000 is a high quality interior paint which meets Japanese Standard. It has excellent anti-alga/mold ability and low odor. Also, it provides various color which makes your lifestyle better and valuable.

Variety of colors



Choose your taste color and Enjoy your lifestyle!
JPMA COLOR CARD 624colors
by Japan paint manufactures association

Process	Paint & Method		Dilution ratio			Coating amount Kg/m ² · 1coat	Coating Interval
Surface Preparation	1) Remove completely Efflorescence, Laitance, Dust, Dirt etc.. by wire brush.						
	2) Dry well until water content below 10% and pH below 9.5, then start painting.						
Under coat	Product	VINYROCK SEALER CONC.	Clean water	Brush Roller Airless	75-100% 75-100% 100%	0.06 - 0.10kg	3hours <
	Tools	Brush, Roller, Airless					
	No. of coat	1coat					
	Coating amount	180 - 300m ² /18kg/1coat					
Top coat	Product	VINYROCK1000	Clean water	Brush Roller Airless	10-20% 10-20% 15-25%	0.11-0.13kg	2hours <
	Tools	Brush, Roller					
	No. of coat	2 – 3 coat					
	Coating amount	154 - 182m ² /20kg/1coat					