


VINYROCK SEALER CONC.

-JAPANESE STANDARD HIGH QUALITY-


Product name	VINYROCK SEALER CONC
Paint type	Acrylic emulsion water based sealer
Use	Interior sealer(New Wall)
Color	White
Coating of amount	0.06-0.10g/m ² • 1coat
No of Coat	1coat
tools	Brush , Roller
Dilution	Clean Water
Dilution ratio	75-100%
Touch Dry	1h
Hard Dry	1h
Coating Interval	3h
Specific gravity	1.22±0.03
Package	18kg
Mid coat of exterior	VINYROCK ELASTIC FILLER
Top coat of exterior	VINYROCK 1000 SUPER VINYROCK HYPER VINYROCK SHIELD HYPER VINYROCK SHIELD GLOSS 1K YUMEROCK

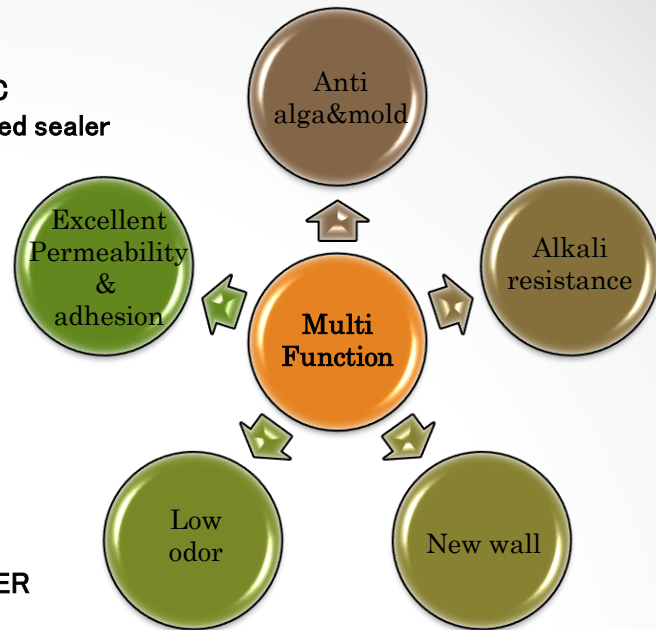


PT. ROCKPAINT INDONESIA
ROCKPAINT.CO.LTD

Japanese Standard

Anti Alga Test(4weeks)

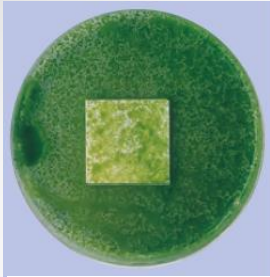

No Anti Alga Type



VINYROCK SEALER CONC
+
SUPER VINYROCK

Anti Mold Test(2weeks)



No Anti Mold Type



VINYROCK SEALER CONC
+
SUPER VINYROCK

【Standard paint process】

Process	Paint & Method		Dilution ratio			Coating amount Kg/m ² · 1coat	Coating Interval
Surface Preparation	1) Remove completely Efflorescence, Laitance, Dust, Dirt etc.. by wire brush.						
	2) Dry well until water content below 10% and pH below 9.5, then start painting.						
Under coat	Product	VINYROCK SEALER CONC	Clean water	Brush Roller Airless	75-100%	0.06 - 0.10kg	3hours <
	Tools	Brush, Roller, Airless					
	No. of coat	1coat					
	Coating amount	180 - 300m ² /18kg/1coat					
Top coat	Product	HYPER VINIROCK SHEILD	Clean water	Brush Roller Airless	10 - 20% 10 - 20% 15 - 25%	0.11 - 0.13kg	2hours <
		HYPER VINIROCK SHEILD GLOSS					
	Tools	Brush, Roller					
	No. of coat	2 - 3coat					
	Coating amount	135 - 160m ² /18kg/1coat					



PT.ROCKPAINT INDONESIA
ROCKPAINT.CO.LTD